




# NEO Double Arch Spool Type Flexible Connectors



- Greater Movement (Almost Double of Single Arch)
- Higher Pressure.
- No gaskets required.
- Absorbs & Isolates Vibrations/Noise/Shock.
- Molded Design for better quality upto size 10" NB.
- Reduces System Noise.
- Absorbs Pipe Movement/Stress.
- Compensates for Misalignment/Offset.
- Drilling Standard ANSI B16.5 Class 150

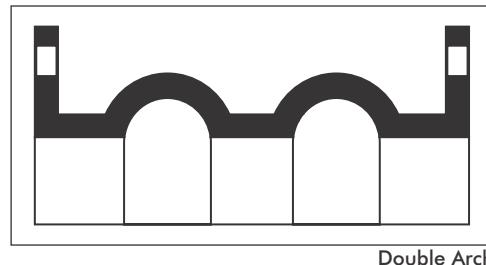

Double Arch

Expansion Joint Size Nom. I.D. Inch	Neutral LENGTH Inch	Expansion Joint Style
1.5	10	REJDA
2	10	REJDA
2.5	10	REJDA
3	10	REJDA
4	10	REJDA
5	10	REJDA
6	10	REJDA
8	10	REJDA
10	10	REJDA
12	12	REJDA
14	12	REJDA

**Compliance** - ASTM F 1123-87 (2004). Testing as per Fluid Sealing Association standard FSA-PSJ-701-06.

**Other Flange Drilling Available :** BS 10 Table D/E/F, BS 4504/DIN 2501 or as per customer

**For Other Polymers Requirement Please Contact Our Engineering Department.**

- Available pressure rating PN10 and PN16 Due to policy of continual improvement, the specifications are subject to change without prior notice.
- Measurements are subject to 5% tolerance.
- To achieve good results do not over load fitting more than designed parameters as per drawing / catalogue.
- Compliance - As per FSA Standards USA.